

Transformers 220 V/24 V

ETR

ET 3490


DS 12491 E-We

Application

These single-phase transformers are used to generate the 24 V A.C. supply voltage required for the Johnson-E 2000/E 3000 system from 220 V/50 Hz power supply voltages.


Protection class:

IP 20

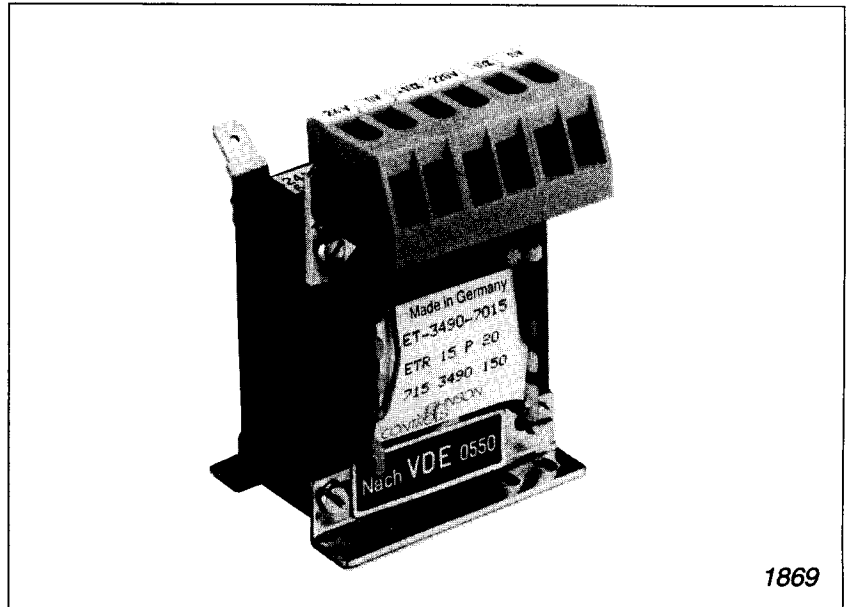

Details for Ordering

Type	Capacity	Weight (kg)	Internat. Code
	Single-phase transformers		
ETR 15 P20	15 VA	0.5	ET-3490-7015
ETR 30 P20	30 VA	1.0	ET-3490-7030
ETR 75 P20	75 VA	2.0	ET-3490-7075
ETR 180 P20	180 VA	4.3	ET-3490-7180
ETR 360 P20	360 VA	7.5	ET-3490-7360

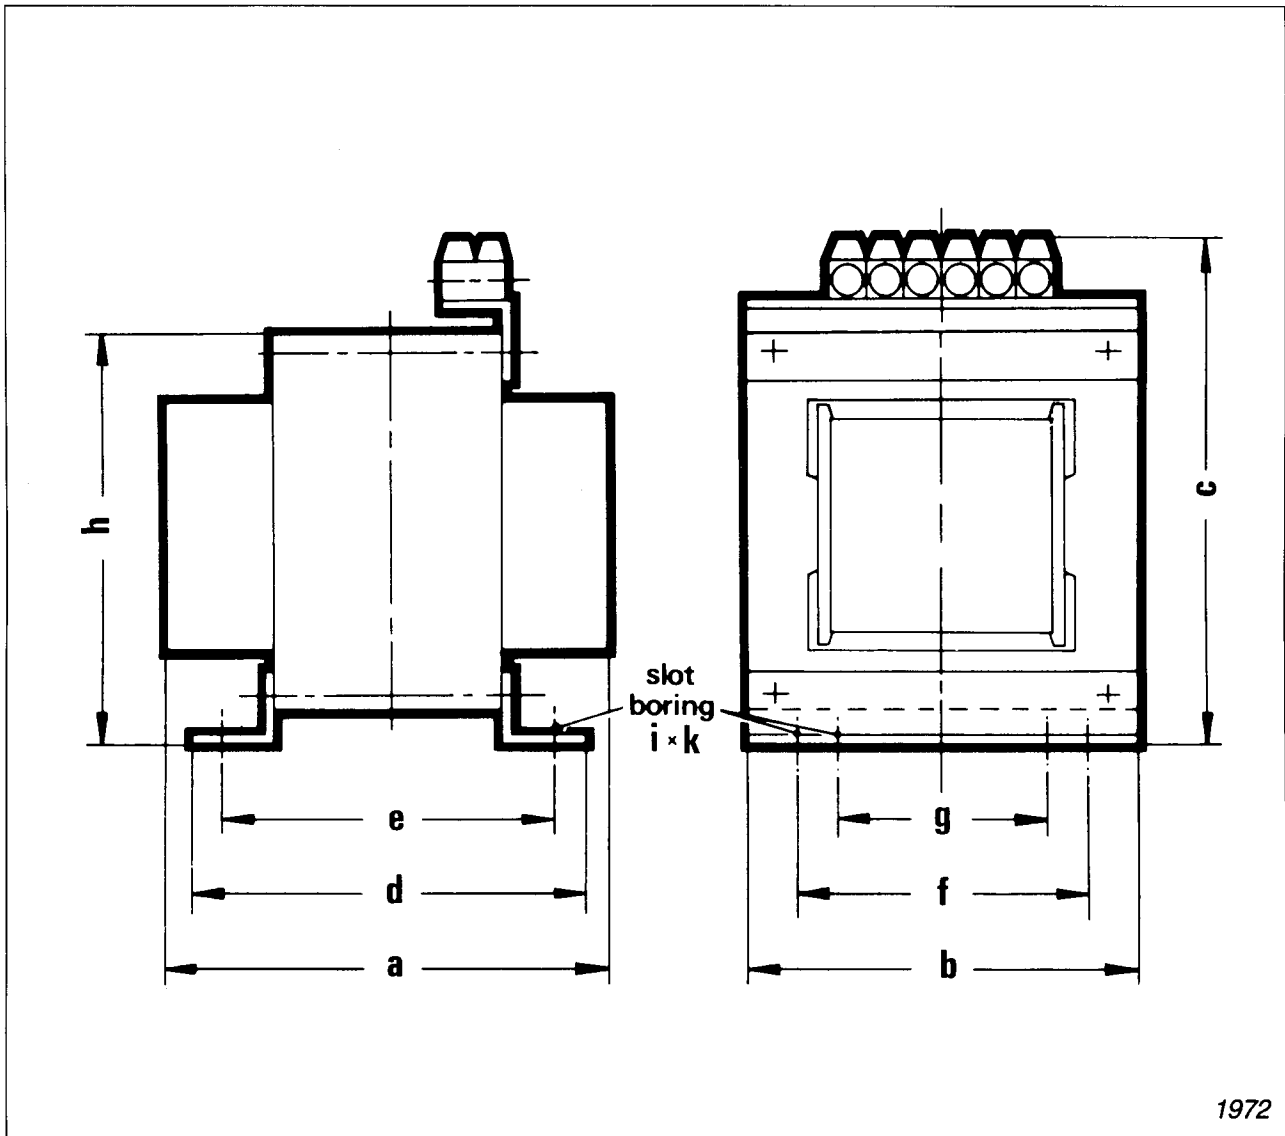Dimensions [mm] Baseplate mounted

1972

Type	Dimensions in mm								
	a	b	c	d	e	f	g	h	$i \times k$
ETR 15 P 20	46	55	80	46	35	44	26	60	3.2 x 5.2
ETR 30 P 20	58	65	92	58	44	54	35	70	4.3 x 6.8
ETR 75 P 20	64	85	110	64	51	72	50	90	4.3 x 6.8
ETR 180 P 20	94	102	130	94	78	81	60	109	5.3 x 8.0
ETR 360 P 20	122	120	185	102	82	105	75	160	9 x 13