

Series P100AP and P100CP

Encapsulated Pressure Control. Auto-reset Standard Duty

Introuction

The P100 Series are encapsulated, non-adjustable, direct mount pressure controls typically used for low and high-pressure cut-outs for OEM applications.

The P100 series are produced according to switchpoint requirements of customers.

The small dimensions, weight and protection class makes the P100 series applicable for use without the need of additional mounting brackets.

The P100 Series can be used for all non-corrosive refrigerants like R134a; R22; R404, R410A and others.

Applications include:

- Computer room air conditioning
- Refrigeration/ Air conditioning condensers
- Commercial refrigeration
- Ice machines
- Food service equipment



P100 pressure controls, automatic reset with wires (top) and automatic reset with 1/4" male quick-connectors (bottom).

Feature and Benefits

<input type="checkbox"/> Compact size and light weight	Allows direct mounting without the need of mounting brackets
<input type="checkbox"/> Encapsulated, dust tight switch IP67	No pollution by electro-magnetic influences
<input type="checkbox"/> Broad variety of electrical and pressure connections.	Applicable in most applications
<input type="checkbox"/> PED cat IV approved	Applicable as safety device

Description

The pre-set snap-acting disc utilised in the P100 series reverses its shape when pressurised to a selected actuation pressure setting. When the disc snaps, it drives a set of electrical contacts open or close. When the pressure falls to the de-actuation pressure setting, the snap-acting disc and electrical contacts reset to their pre-set position.

Automatic reset models

Automatic reset models are provided with SPST contacts for either "Open High" (P100CP-**) or "Open Low" function (P100AP-**)

Note

The controls are intended to control equipment under normal operating conditions. Where failure or malfunctioning of the controls could lead to an abnormal operating condition that could cause personal injury or damage to the equipment or other property, other devices (limit or safety controls) or systems (alarm or supervisory systems) intended to warn of or protect against failure or malfunctioning of the controls must be incorporated into and maintained as part of the control system.

Adjustment

These controls are factory set on customers' requirements and are not field adjustable. The trip-points can be selected from here after listed tables.

Automatic reset models pressure range differentials and tolerances

Actuation pressure range*	Standard tolerance*	Minimum tolerance*	Optimum differential band***	Minimum Release Pressure***	Maximum Release Pressure***
psig bar **	psi bar **	psi bar **	% of Actuation pressure	% of Actuation pressure	% of Actuation pressure
<u>10-20</u> 0,7 to 1,4	<u>± 4</u> ± 0,3	<u>± 4</u> ± 0,3	25-45	20	50
<u>21 to 30</u> 1,4 to 2	<u>± 5</u> ± 0,35	<u>± 5</u> ± 0,35	30-50	25	55
<u>31 to 40</u> 2,1 to 2,8	<u>± 6</u> ± 0,4	<u>± 5</u> ± 0,35	35-60	30	65
<u>41 to 50</u> 2,8 to 3,4	<u>± 6</u> ± 0,4	<u>± 6</u> ± 0,4	40-60	35	65
<u>51 to 60</u> 3,5 to 4,1	<u>± 7</u> ± 0,5	<u>± 6</u> ± 0,4	40-65	35	70
<u>61 to 70</u> 4,2 to 4,8	<u>± 8</u> ± 0,6	<u>± 7</u> ± 0,5	45-70	40	75
<u>71 to 120</u> 4,9 to 8,3	<u>± 8</u> ± 0,6	<u>± 7</u> ± 0,5	50-75	40	80
<u>121 to 250</u> 8,3 to 17,2	<u>± 10</u> ± 0,7	<u>± 7</u> ± 0,5	60-75	50	80
<u>251 to 350</u> 17,3 to 24,1	<u>± 15</u> ± 1	<u>± 10</u> ± 0,7	60-75	55	80
<u>351 to 500</u> 24,2 to 34,5	<u>± 20</u> ± 1,4	<u>± 10</u> ± 0,7	65-80	60	85
<u>501 to 750</u> 34,6 to 52	<u>± 25</u> ± 1,7	<u>± 15</u> ± 1	70-80	65	85

* At room ambient temperature.

** Values are rounded.

*** In percentages of Actuation (highest) pressure (Release/ Actuation %)

Do not use smaller differentials or smaller tolerances as necessary for the application (price consequences)

Contact functions

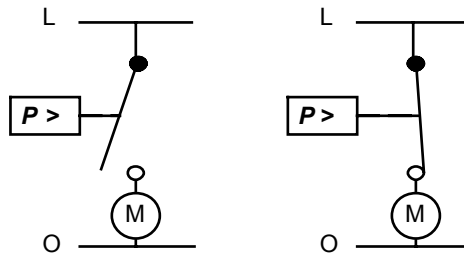


Fig. 1

SPST-NO
LP protection
+ fan-cycling
P100AP


SPST-NC
HP protection
P100CP

Repair and replacement

Repair is not possible. In case of an improperly functioning control, please check with your nearest supplier.

When contacting the supplier for a replacement you should state the type/model number of the control. This number can be found on the data plate.

Dimensions

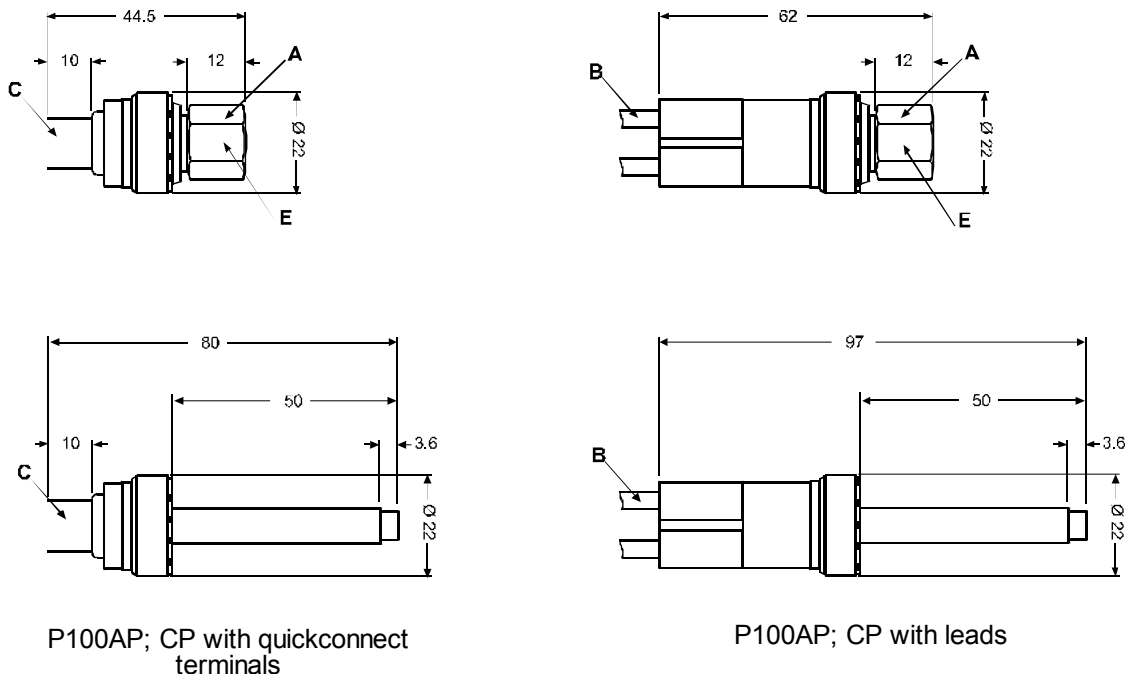

P100AP; CP with quickconnect terminals

P100AP; CP with leads

Fig. 2

- A. 7/16"-20 UNF female flare tube fitting with valve depressor (SAE 1/4").
- B. # 18 AWG (Å 0.8 mm²) Cross linked Polyethylene insulated wire.
- C. 1/4" Quick-connect terminals (6.35 x 0.81 mm).
- E. 9/16" HEX.

P100 Specification Worksheet

A: General

- Standard Duty Control (SPST Contacts)
- Heavy Duty Control
 - SPST Contacts
 - SPDT Contacts

B: High Trip Point _____ **PSIG**
(bar)

C: Auto Reset Models Only

- High trip point tolerance _____ PSI (bar)
- Low trip point _____ PSIG (bar)
- Low trip point tolerance _____ PSI (bar)

Mark one section from each of the category **D** through **F**.

D: Control Construction

- Open high, close low
- Open low, close high
- Open high manual reset (standard duty models only)

E: Electrical Termination

Wire leads with 1/2" stripped ends.

- 6" 12" 18" 24"
- 30" 36" 42" 48"
- 60" 72"

Without wire leads

- Spade terminals 90° (auto reset models only)
- Screw terminals 90° (heavy duty auto reset models only)
- Spade terminals 45° (heavy duty SPST models only)
- Screw terminals 45° (heavy duty SPST models only)
- Other options (please describe)

F: Pressure Connection

Pressure Connection Standard

- 1/4" Female Flare with Internal Depressor

Brazed Fittings

- 2" Straight 1/4" Diameter tube
- 50 mm Straight 6 mm Diameter tube
- Other options (please describe)

Customer information

Customers Name: _____

Date: _____

Contact Person: _____

Telephone: _____

Brief description of Application: _____

Annual usage (min. order qty 250)

(For P100AP-** and P100CP models
min. order qty: 100pcs)

**Mail/Fax complete form to your local
Johnson Controls office**

Notes

Specifications

Type number*	P100AP standard duty; SPST; open low; auto. reset. P100CP standard duty; SPST; open high; auto. reset.
Short term overpressure	Range 20 to 100 PSIG : 250 PSIG (1.4 to 6.9 bar) (17.2 bar) Range 101 to 500 PSIG: 600 PSIG (6.9 to 34.5 bar) (41.4 bar) Range 501 to 750 PSIG 950 PSIG (34,5 to 52 bar) (65 bar)
Burst pressure	5000 PSIG (345 bar)
Life at Rated Current	100000 cycles
Temperature	Ambient: -30 to + 65 °C Refrigerant: -55 to +135 °C
Vibration	15 G max. (between 20 to 2000 Hz)
Range and differential	See pressure range tables
Setpoint tolerances	From ± 4 to ± 25 PSIG (± 0.3 to ± 1.7 bar) See pressure range tables.
Approvals	UL reg. file SA 516 Guide SDFY 2 CSA reg. file LR 63963 Class 1222-01 PED 97/23/EG category IV (TUV) DIN 32733
Protection Class	IP67 for models provided with wires IP20 for models provided with QC terminals
Electrical Ratings	Standard duty : SPST # RLA 6 A, LRA 36 A at 120/240 Vac Pilot duty, 375 VA at 120/277 Vac Pilot duty, 125 VA at 24 Vac
Electrical connections	1/4" quick connect terminals (6.35 x 0.81 mm) Auto. reset models only. Cable 18 AWG (0.8 mm ²) stranded and tinned copper with 600V 125°C Cross linked Polyethylene 1/32" insulation. Available in lengths on request in multipliers of 6" (Standard length 48")
Pressure connections	1/4" Female flare with valve depressor 1/4" ODM solder connection 6 mm ODM solder connection Other connections available on request

- Quantity orders only
- # RLA = Resistance Load Amp.
LRA = Locked Rotor Amp.

The performance specifications are nominal and conform to acceptable industry standards. For applications at conditions beyond these specifications, consult the local Johnson Controls office or representative. Johnson Controls shall not be liable for damages resulting from misapplication or misuse of its products.

**JOHNSON
CONTROLS**

Johnson Controls International, Inc.

Headquarters: Milwaukee, WI, USA
European Headquarters: Westendhof 8, 45143 Essen, Germany
European Factories: Lomagna (Italy), Leeuwarden (The Netherlands) and Essen (Germany)
Branch Offices: Principal European Cities.

This document is subject to change

Printed in Europe

Notes

Specifications

Type number*	P100AP standard duty; SPST; open low; auto. reset. P100CP standard duty; SPST; open high; auto. reset.
Short term overpressure	Range 20 to 100 PSIG : 250 PSIG (17.2 bar) Range 101 to 500 PSIG: 600 PSIG (41.4 bar) Range 501 to 750 PSIG 950 PSIG (65 bar)
Burst pressure	5000 PSIG (345 bar)
Design life	Auto. reset models : 100000 cycles
Temperature	Ambient: -30 to + 65 °C Refrigerant: -55 to +135 °C
Vibration	15 G max. (between 20 to 2000 Hz)
Range and differential	See pressure range tables
Setpoint tolerances	From ± 4 to ± 25 PSIG (± 0.3 to ± 1.7 bar) See pressure range tables.
Approvals	UL reg. file SA 516 Guide SDFY 2 CSA reg. file LR 63963 Class 1222-01 DIN - DWFK4B09799 for P100AP models, for decreasing pressure DIN - DWK4B09699 for P100CP models, for increasing pressure
Protection Class	IP67 for models provided with wires IP20 for models provided with QC terminals
Electrical Ratings	Standard duty : SPST 6(6) A/ 240 Vac Pilot duty 375 VA at 120/240/277 Vac Max. 28 Vdc, 2 A
Electrical connections	1/4" quick connect terminals (6.35 x 0.81 mm) Auto. reset models only. Cable 18 AWG (0.8 mm ²) stranded and tinned copper with 600V 125°C Cross linked Polyethylene 1/32" insulation. Available in lengths on request in multipliers of 6" (Standard length 48")
Pressure connections	1/4" Female flare with valve depressor 1/4" ODM solder connection 6 mm ODM solder connection Other connections available on request

* Quantity orders only

The performance specifications are nominal and conform to acceptable industry standards. For applications at conditions beyond these specifications, consult the local Johnson Controls office or representative. Johnson Controls shall not be liable for damages resulting from misapplication or misuse of its products.

**JOHNSON
CONTROLS**

Johnson Controls International, Inc.

Headquarters: Milwaukee, WI, USA
European Headquarters: Westendhof 8, 45143 Essen, Germany
European Factories: Lomagna (Italy), Leeuwarden (The Netherlands) and Essen (Germany)
Branch Offices: Principal European Cities.

This document is subject to change

Printed in Europe